
CO/ONY

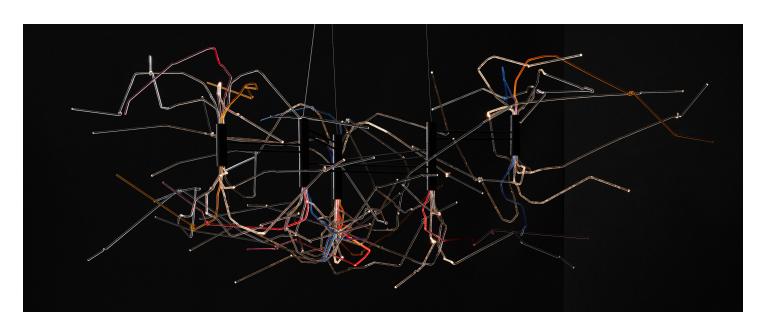

BEC BRITTAIN Aries Rising Capricorn I

Standard Materials: Aluminum, Acrylic Rods

Dimensions: 69"L x 50"D x 29"H

Lead Time: 14-16 weeks

LED Illumination:

24 VDC LED PCB 0-10V Dimming 2700 Kelvin

Electrical:

12.6 Watt 1,512 Lumens Lutron Hi-Lume

Standard Installation:

Locally Mounted Driver 120V C-L switching dimming (Lutron) 240V 0-10V ireless dimming (Lutron Pico) 8"ø x 1.625"D canopy, matching finish

Alternative Installation:

Remotely Mounted Driver 120V C-L switching dimming (Lutron) 240V 0-10V hardwired dimming 5"ø x .25"D canopy, matching finish

Suspension:

One 24V low volatage power / suspension cable to electrical connection. Aircraft cable to ceiling-mounted adjustable fasteners. Variable suspension height.

Please inquire for detailed electrical specs. ETL listed to UL, CE and CSA standards, suitable for damp locations.